


BUSATIS - DOUBLE BLADE TECHNOLOGY

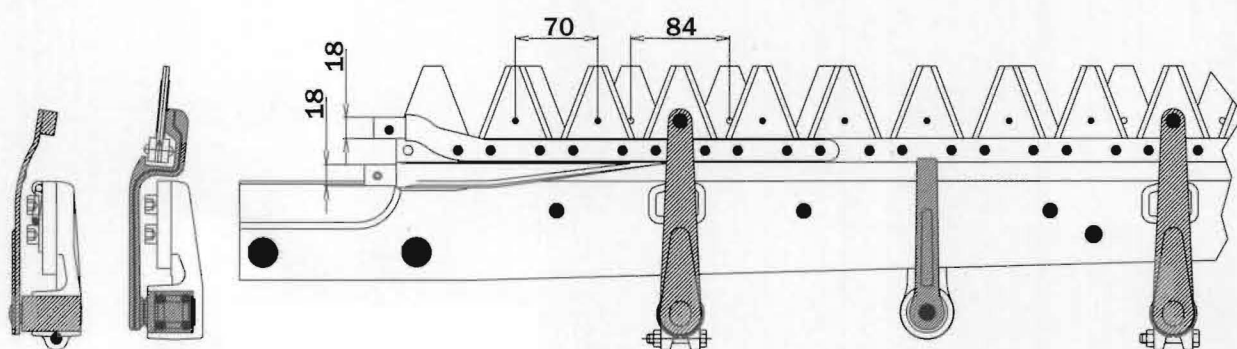

Robust design For professional use.

Strong mowing performance . High mowing speed and broad cutting width.

Long service life Patented ESM Carbodux® knife sections.

Minimal maintenance Adjustment of the lower guides not necessary.

Lean construction Best suited for special uses.

Comfortable handling Vibration-free action – no clogging.



Environmentally friendly Low power consumption – Protection of small organism.

Improved mowing Clean fodder for healthy livestock.

Mow anything The professional mowing system for all applications in the area of fodder harvesting and special harvesting technology as well as for a wide range of other special uses.




Drive system versatility and various fitting modes provide a host of professional applications.

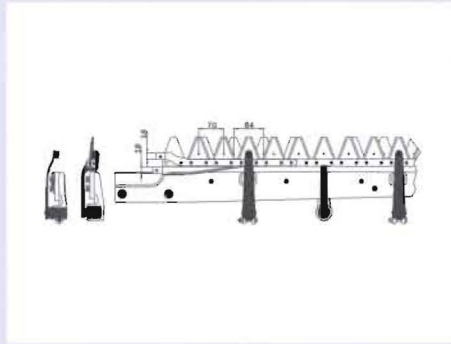


Drive located at the centre on front bar (wobble plate or rocker arm drive).




One-sided drive for rocker arm and connecting rods for front bars.




Left and right-hand drives with rocker arm and connecting rods for portal bars.



Rack rocker arm inner shoe drive for side bars. Hydro-motor located in front of crank drive.



Rack rocker arm inner shoe drive for side bars. Hydro-motor behind the crank drive for bars operating on the left or the right.



Rack rocker arm inner shoe drive for side bars with V-belt pulley fitted at the back.

Technical data:

Width of cut	1 m - 7,5 m
Section pattern	70 - 84 mm
Mowing speed	3 - 11 km
Double stroke count per minute	800 to 1400
Stroke – Top blade	42 - 60 mm
Stroke – Bottom blade	30 - 48 mm
Power consumption per 1 m of cutting width	about 2,2 - 2,5 kW

ESM

Ennepetaler Schneid- und Mähtechnik GmbH & Co.KG

Kölner Straße 29 • 58256 Ennepetal - Germany

Telefon +49 (0) 23 33/96 88-0 • Telefax +49 (0) 23 33/96 88-88

@ contact@esm-ept.de • www.esm-ept.de

ESM products, as far as applicable, are CE certified with the pertinent standard EN 12733